







NFC61-314 style sockets
High quality, light weight aluminium housing
Switched and unswitched options
LED indicated unit power
Up to 9 sockets per unit
Choose from vertical and horizontal mounting options

Product Overview

Excel range of power distribution units are designed for installation and use within 19" networking cabinets and enclosures. Each unit comprises a high quality aluminium extruded housing into which are loaded up to 12 sockets. In this particular range each socket is 'NFC - French' style.

The range of available units includes 19" horizontally mounted, higher density vertical mounted options, and a choice of styles with our without switches to control input power to the unit itself. The unswitched versions have an LED indicator to confirm power to the unit, in the switched versions the switch itself acts as the LED indicator, as shown in the drawing below.

Product Specifications

Feature	Values
Mounting dimension	19 inch
Mounting direction	Horizontal
Electrical connection	Connecting cord with plug
Type of electric plug connection	NFC (2 Pin DIN49441)
Cable length	3 m
Number of other socket outlets	6 (NFC 2 Pin DIN49441)
Width	482.6 mm
Height	62 mm
Depth	45 mm

Excel 6-way PDU c/w 6xNFC sockets, 16-Amp plug, Switched, w/ LED indicator

Item Code: 555-092




Supply voltage	250 V
Switchable	Yes
With LED indication	Yes
With mounting bracket	Yes

Additional specifications


Features	Values
Input cable type	3 core 1.5mm cable
Rated Voltage	250 V AC 50/60 Hz
Rated current	16 Amp
Maximum power	4000 W
Unit control	LED indicator. On/off rocker switch
Insulation Resistance	≥5MΩ
Fire resistance	Flame retardant
Operating temperature	-10° +45°C
Relative humidity	0% - 90%
Cable entry (horizontal orientation)	Left
Housing colour	Silver
Housing material	Aluminum

Included accessories


Accessories	Quantity
M6 x 4 fixings	x4
user manual	xl
6mm earth cable	xl





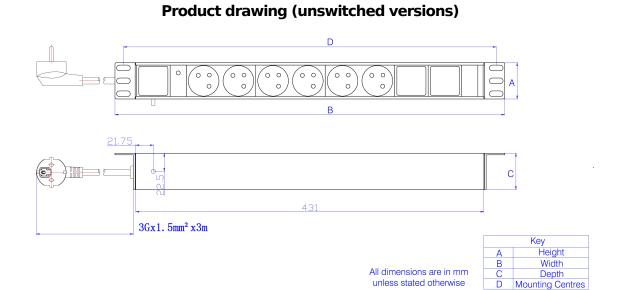

Product drawing (switched versions)

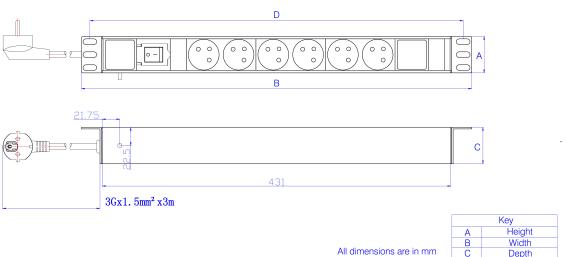

unless stated otherwise

Α	Height
В	Width
С	Depth
. D	Mounting Centres

Item Code: 555-092



Standards

Applicable standard	Detail
RoHS	Restriction of Hazardous Substances - Compliant
NFC 61 314:2017	Plugs And Socket-Outlets For Household And Similar Purposes - 6 A/250 V And 16 A/250 V

Part Number Table

Part Number	Description
555-092	Excel 6-way PDU c/w 6xNFC sockets, 16-Amp plug, Switched, w/ LED indicator
555-093	Excel 8-way PDU c/w 8xNFC sockets, 16-Amp plug, Switched, w/ LED indicator
555-097	Excel 6-way PDU c/w 6xNFC sockets, 16-Amp plug, Unswitched, w/ LED indicator
555-098	Excel 8-way PDU c/w 8xNFC sockets, 16-Amp plug, Unswitched, w/ LED indicator
555-122	Excel 9-way PDU c/w 8xNFC sockets, 16-Amp plug, Unswitched, w/ LED indicator

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.