Item Code: 555-072







- X High quality aluminium housing

 X Switched and unswitched options
 - X Up to 12 sockets per unit

X LED indicator

- X Choose from vertical and horizontal mounting options
- 2 metre PVC input lead terminated with 2 pin DIN49441 plug

Product Overview

Excel range of power distribution units are designed for installation and use within 19" networking cabinets and enclosures. Each unit comprises a high quality aluminium extruded housing into which are loaded up to 12 sockets. In this particular range each socket is 'Schuko' style, manufactured in accordance with the DIN49441 standard, the 2 metre input lead is terminated with a 16AMP rated 2 time circular pin DIN49441 plug top.

The range of available units includes 19" horizontally mounted, higher density vertical mounted options, and a choice of styles with and without switches to control input power to the unit itself.

The unswitched versions have a LED indicator to confirm power to the unit, in the switched versions the switch itself acts as the LED indicator.

Product Specifications

Feature	Values
Mounting dimension	19 inch
Mounting direction	Horizontal
Electrical connection	Connecting cord with plug
Type of electric plug connection	2 Pin DIN49441
Cable length	3 m
Number of Schuko socket outlets	5
Number of rack units (RU)	2

Item Code: 555-072



Width	482.6 mm
Height	62 mm
Depth	45 mm
Supply voltage	250 V
Switchable	Yes
With LED indication	Yes
With mounting bracket	Yes


Additional specifications

Features	Values
Input cable type	3 core 1.5mm cable
PDU Input cable connector	N/A
Rated Voltage	250 V AC 50/60 Hz
Rated current	16 Amp
Maximum power	4000 W
Unit control	LED indicator. On/off rocker switch
Insulation Resistance	≥5MΩ
Fire resistance	Flame retardant
Operating temperature	-10°C to +45°C
Relative humidity	0% to 90%
Cable entry (horizontal orientation)	Left
Cable entry (vertical orientation)	Тор
Master Circuit Breaker	NO
Master Switch	Yes (only on products marked as 'Switched'
Housing colour	Silver
Housing material	Aluminum

Item Code: 555-072



Product drawing

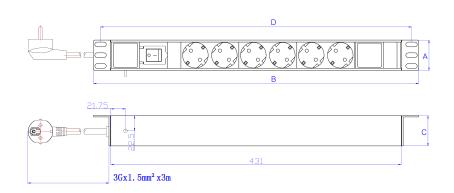

Key		
Α	Height	
В	Width	
С	Depth	
.D .	Mounting Centres	

All dimensions are in mm

Standards

Applicable standard	Detail
RoHS	Restriction of Hazardous Substances - Compliant
DIN VDE 0620-2-1:2016	Plugs and socket-outlets for household and similar purposes
DIN 49441	Two-pole Plugs with Earthing Contact 10 A 250 V \approx AND 10 A 250 V $_{\square}$, 16 A 250 V $_{\wedge}$

Included accessories

Accessories	Quantity
M6 x 4 fixings	x4
user manual	x1
6mm earth cable	x1

Part Number Table

Part Number	Description
555-072	Excel 6-way Horizontal PDU - 6x Schuko sockets, Schuko Plug - Switched
555-073	Excel 8-way Vertical PDU - 8x Schuko sockets, Schuko Plug - Switched
555-082	Excel 6-way Horizontal PDU - 6x Schuko sockets, Schuko Plug - Unswitched
555-083	Excel 8-way Vertical PDU - 8x Schuko sockets, Schuko Plug - Unswitched

Item Code: 555-072



555-084 Excel 9-way Vertical PDU - 9x Schuko sockets, Schuko Plug - Unswitched

555-086 Excel 12-way Vertical PDU - 12x Schuko sockets, Schuko Plug - Unswitched

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.