

X 100% Optical Test

X Test Certificate with each cable

X Batch Number Tracking

**Features**

- 100% Optical Test
- Batch Number Tracking
- White 900 micron 50/125 cable
- Choice of length
- Each cable is individually bagged and labelled
- Test Certificate with each cable
- Semi tight buffered 'easy strip' fibre
- Broad range of connectivity options
- RoHS Compliant
- Factory terminated under ISO9001 quality control procedures

**Product Overview**

Excel fibre optic pigtails are manufactured from the highest quality 900 micron optical fibre, terminated with ceramic ferrule connectors of various types. To assist in fast cable preparation and splicing semi tight buffered, easy strip, cable is used as standard. Cable preparation, termination and testing is carried out to strictly managed procedures in an Excel approved, ISO9001 registered manufacturing facility.

Each pigtail has a strain relief boot to prolong and maintain performance levels of the assembly. A short distance from the connector a label containing a unique batch number is fixed to cable for quality and traceability purposes.


**Performance Characteristics**

Connector

Measure	ST Connector	SC Connector	LC Connector
Insertion Loss dB @850nm	< 0.3	< 0.3	< 0.3
Ferrule	2.5mm ceramic	2.5mm ceramic	1.25mm ceramic
Housing	Nickel Brass	Composite	Composite
Connector Design	EC60874-10-1997	IEC61754-4	IEC61754-20
End surface test	OP-03-05001	OP-03-05001	OP-03-05001


# Product Schematics

## ST

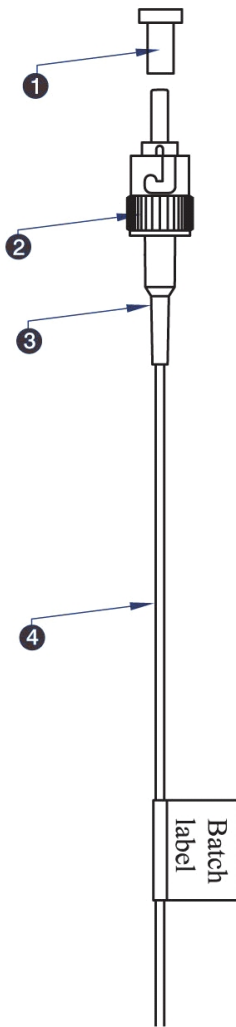


- 1 ST Dust cover
- 2 ST 0.9 multimode connector
- 3 ST 0.9 Black strain relief boot
- 4 0.9mm Easy Strip OM3 50/125 LSOH White cable

## SC

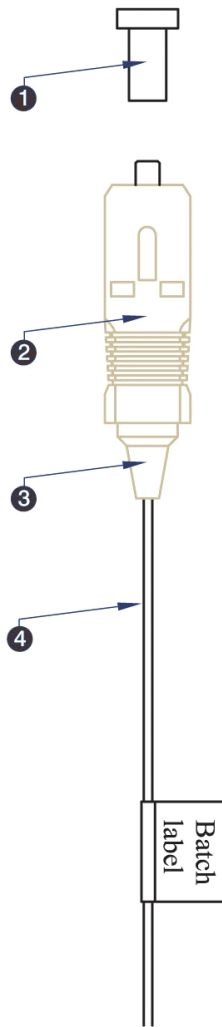


- 1 SC Dust cover
- 2 SC 0.9 multimode Beige connector
- 3 SC 0.9 Beige strain relief boot
- 4 0.9mm Easy Strip OM3 50/125 LSOH White cable

## LC

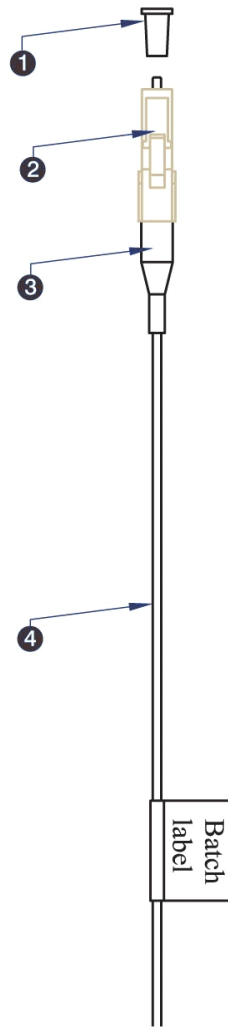


- 1 LC Dust cover
- 2 LC 0.9 multimode Beige connector
- 3 LC 0.9 White strain relief boot
- 4 0.9mm Easy Strip OM3 50/125 LSOH White cable

## Cable Profile

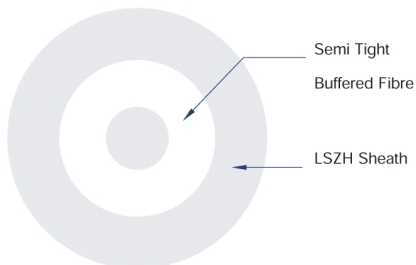

## Packaging

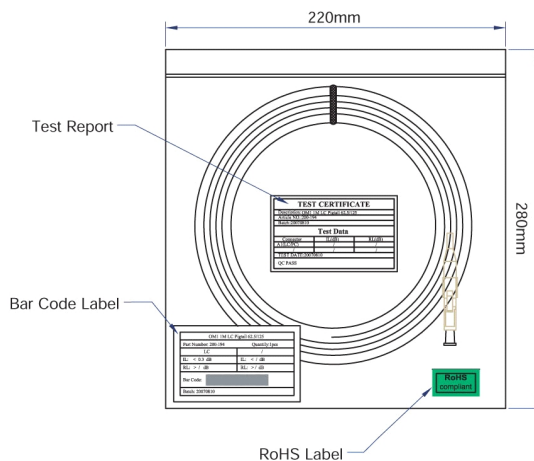

## Cable

Measure	ST Assembly	SC Assembly	LC Assembly
Attenuation Max dB @850nm	≤ 3.5	≤ 3.5	≤ 3.5
Attenuation Max dB @1300nm	≤ 1.0	≤ 1.0	≤ 1.0
Bandwidth Min MHz.km @850nm	≥1500	≥1500	≥1500
Bandwidth Min MHz.km @1300nm	≥500	≥500	≥500
No of Fibres	1	1	1
Outer Diameter mm	0.9	0.9	0.9
Outer sheath colour	White	White	White
Outer sheath μm	900	900	900
Outer sheath Material	IEC332-1 LSOH	IEC332-1 LSOH	IEC332-1 LSOH
Temperature range °C	-20 to + 70	-20 to + 70	-20 to + 70
RoHS Compliant	Yes	Yes	Yes
Weight kg/km	0.9	0.9	0.9
Min Bend Radius mm			
During installation	5.0	5.0	5.0
After installation	3.0	3.0	3.0

## Part Number Information

Part No.	Description
200-577	Pigtail 50/125 OM3 ST 2m
200-555	Pigtail 50/125 OM3 SC 2m
200-560	Pigtail 50/125 OM3 LC 2m

## axilan

c.so santorre di santarosa 36, cuneo, Cuneo, 12100, Italia

Tel: +390171692038

Email: [info@axilan.it](mailto:info@axilan.it) Web: [www.axilan.it](http://www.axilan.it)



**AXILAN**<sup>®</sup>  
OPTICAL and COPPER WIRING

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.

[www.excel-networking.com](http://www.excel-networking.com)

This document is subject to change without notice. The current version is available from our website [here](#).